Product Codes: VGA02IR

File Ref. **UNCONTROLLED COPY**

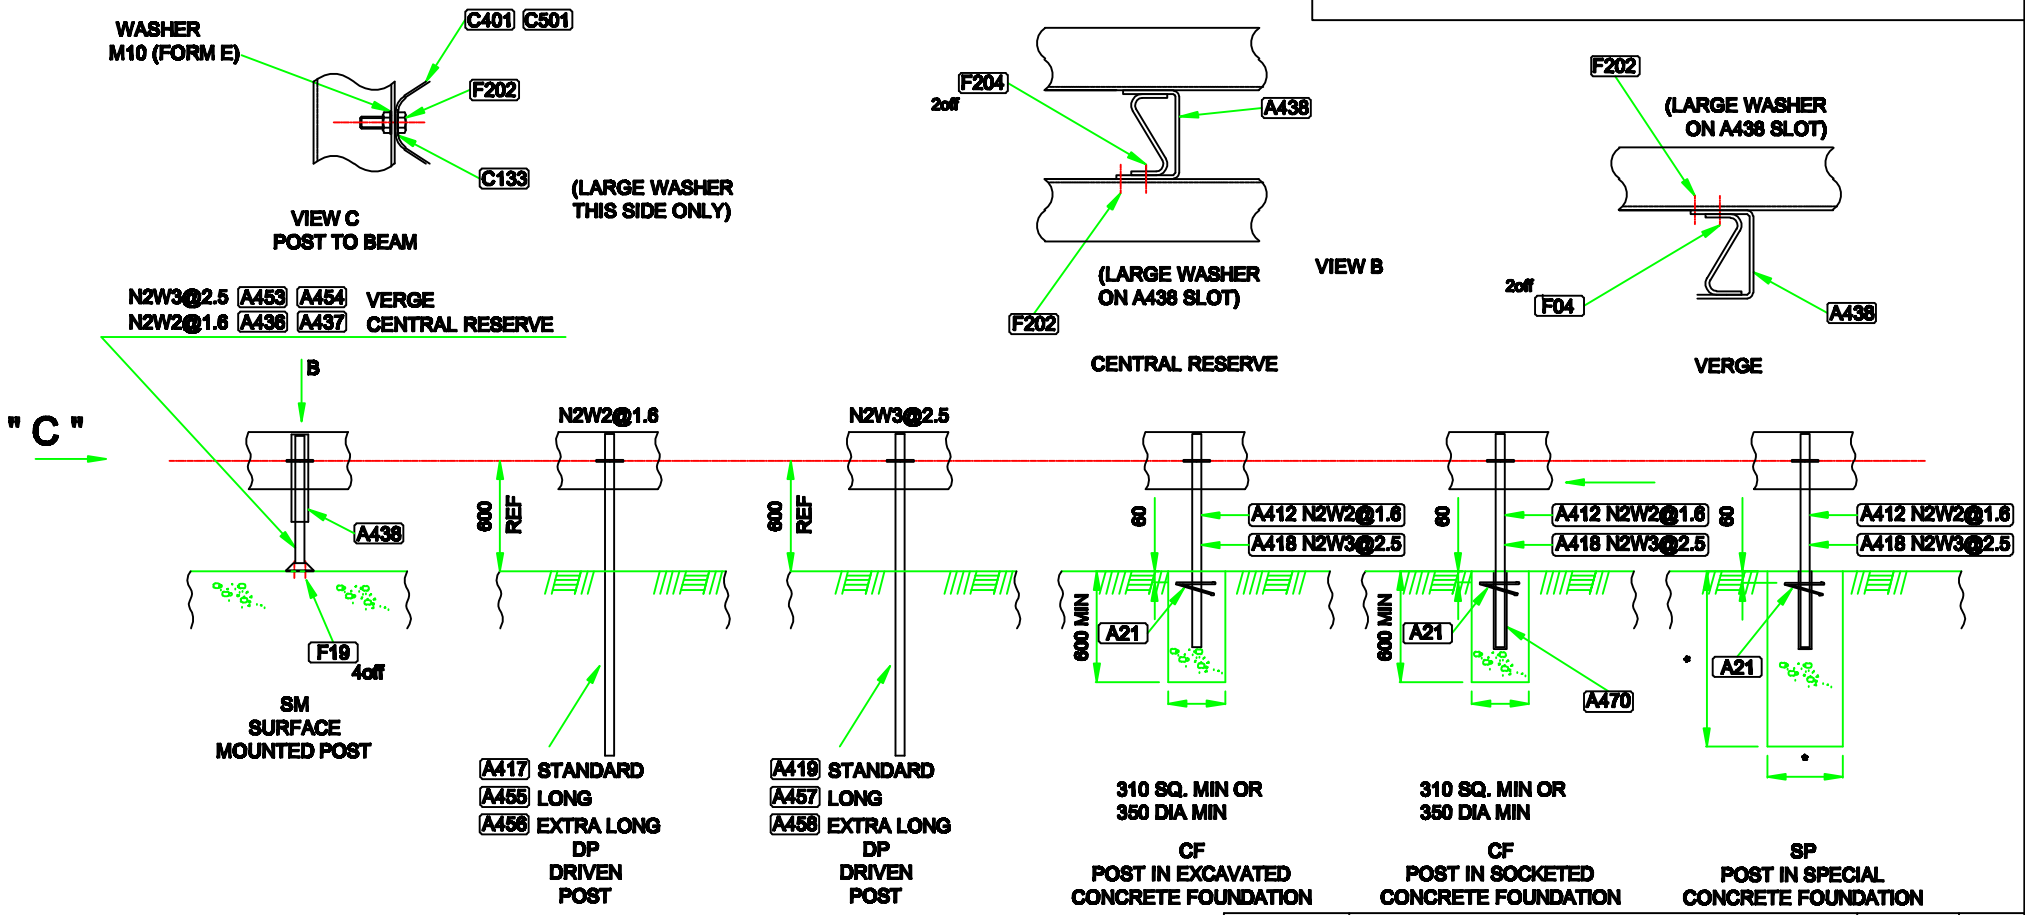

NOTES:

* 1. SPECIAL CONCRETE FOUNDATIONS TO BE CONSTRUCTED TO THE DIMENSIONS DESCRIBED IN THE CONTRACT.
2. CONCRETE TO BE MIX ST5/C25 UNLESS OTHERWISE DESCRIBED IN THE CONTRACT.
3. All DRIVEN, EXCAVATED AND SOCKETED FOUNDATIONS ARE TO BE PROVEN BY PUSH / PULL TESTING. THE 160 X 49 POST MUST ACHIEVE A BENDING MONENT OF 6000 Nm WITHOUT THE DEFLECTION EXCEEDING 100mm.
4. SUGGESTED CORE DIAMETER FOR THIS POST IS Ø250.

ALTERNATIVE INTERMEDIATE POSTS
FOUNDATIONS AND FIXINGS

Rev. No	Revision Notes	Rev. Date	By
7	A412, A436 & A453 Posts Added	24/11/10	R.P.
6	Incorrect material grade shown on drawing, material grades removed & part number changed.	01/02/08	R.P.
5	Note 3 modified, Note 4 added & A417 Post Added	01/02/08	R.P.
4	A419 Post Removed	01/11/06	R.P.
3	Note 3 added	26/10/06	R.P.
2	Ø350 concrete changed to 310 sq in 2 areas	18/10/06	R.P.
1	A455 and A456 posts added.	13/10/06	R.P.

corus

Corus Distribution
& Building Systems

CORUS CEP, LLANWERN WORKS
NEWPORT, S. WALES, UK, NP19 4QZ

Sales tel: +44 (0) 1633 290011 Fax: +44 (0) 1633 464508
Technical tel: +44 (0) 1633 752100 Fax: +44 (0) 1633 464508
© Corus email: saferoads@corusgroup.com

DESCRIPTION	General Arangement - 160 x 49 Posts				
CUSTOMER					
PRODUCT	Vetex			DRG. No.	SH. REV.
DATE	26/06/06				
DRAWN	RJ	CHECKED	MRL	VGA02IR	1 7
SCALE	NTS				