


- NOTES:**
1. FOR DETAILS OF ALTERNATIVE POSTS, FOUNDATIONS AND FIXINGS SEE DRG NO. VGA0 3
 2. THIS TYPE OF BARRIER SHALL NOT BE USED WHERE THE FULL HEIGHT LENGTH (EXCLUDING P1's & P4's) IS LESS THAN 20M.
 3. THIS TYPE OF BARRIER SHALL NOT BE USED ON CURVES OF RADIUS LESS THAN 50m. FOR RADIUS LESS THAN 50m CONTACT CORUS CEP.
 4. WHERE A KERB IS REQUIRED THE PREFERRED HEIGHT IS 75mm. MAX HEIGHT IS 125mm.
 5. CS01, 2 SLOT BEAMS CAN ALSO BE USED TO ACHIEVE NZW2@2.0



REV	COMMENTS	DATE	BY
2	Note 5 Added	13-08-11	RP
1	BEAM CODE CHANGED	24-01-11	AB

Tata Construction Products

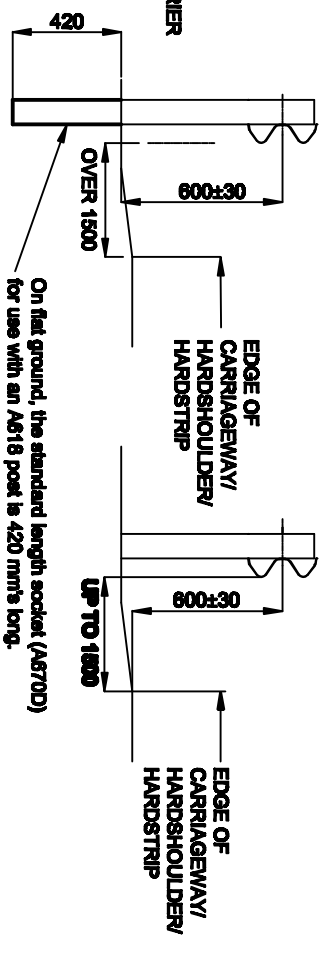

TATA CP, LLANWERN WORKS
NEWPORT, S. WALES, UK, NP19 4QZ

Sales tel: +44 (0) 1633 290011 Fax: +44 (0) 1633 464508
Technical tel: +44 (0) 1633 752100 Fax: +44 (0) 1633 464508
© Tata email: safeforwards@stateltd.com

DESCRIPTION	N2 W2 2.0M CTRS SINGLE SIDED		
CUSTOMER	VETEX		
PRODUCT	DATE		
DATE	3/07/07	CHECKED	DRG. No. VGA320
DRAWN	RP	SCALE	SH. REV. 1 2
SCALE	NTS		