


PLAN VIEW OF BARRIER

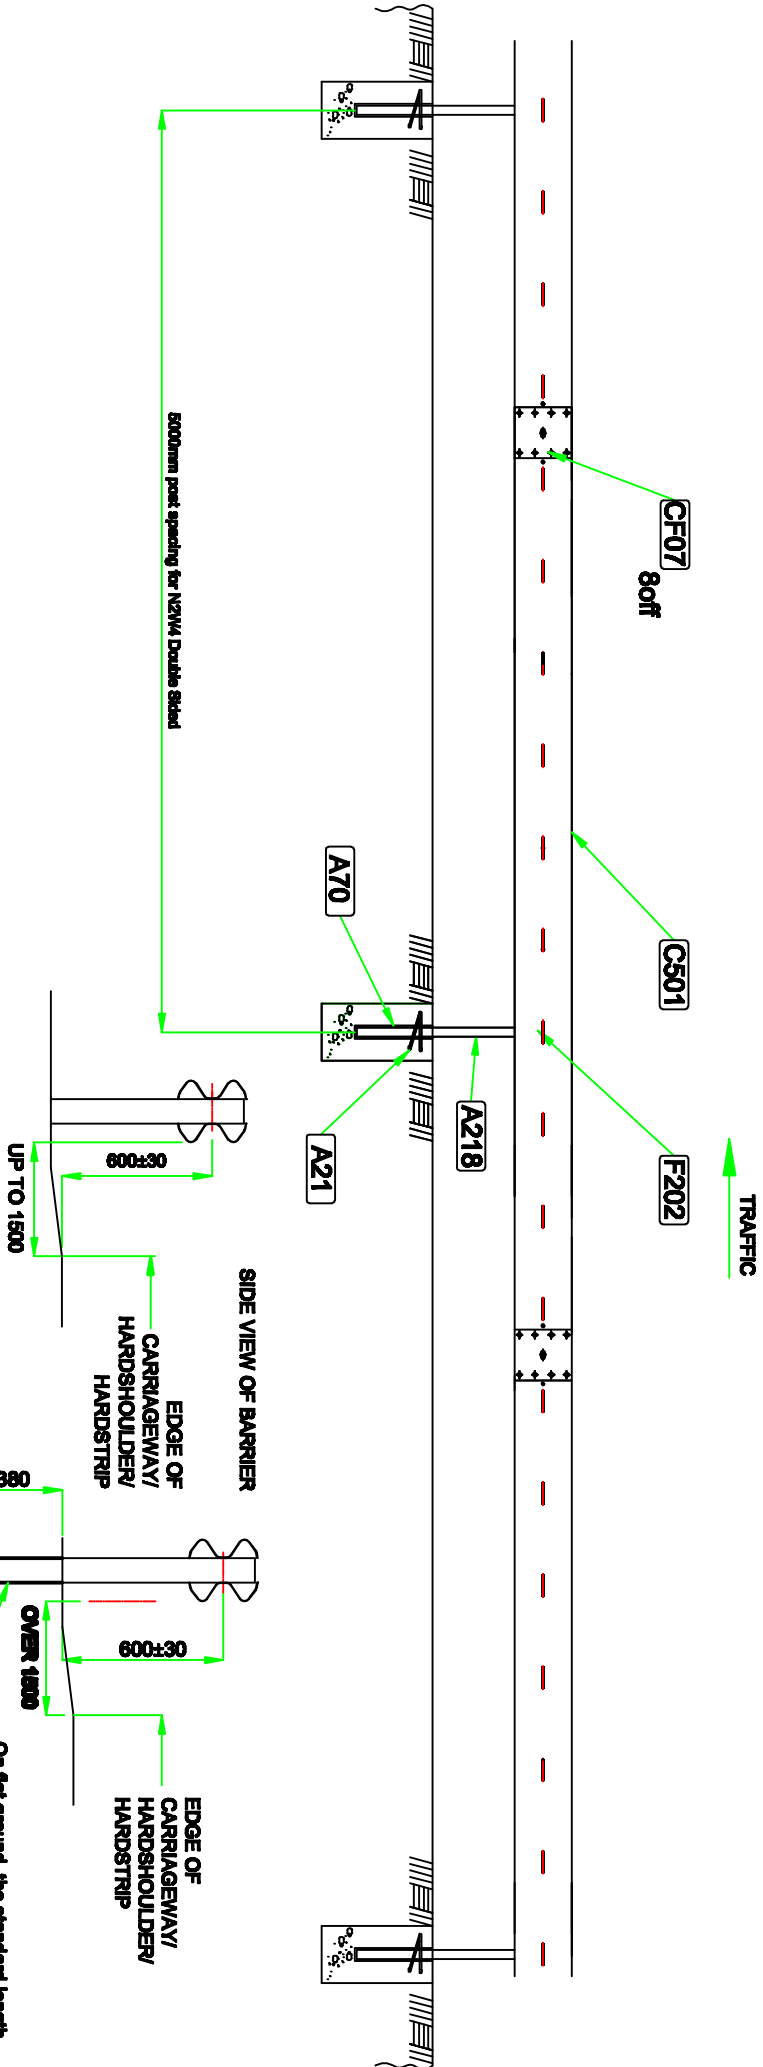

SIDE VIEW OF BARRIER

- NOTES:
1. FOR DETAILS OF ALTERNATIVE POSTS, FOUNDATIONS AND FIXINGS SEE DRG No. VGA01
  2. THIS TYPE OF BARRIER SHALL NOT BE USED WHERE THE FULL HEIGHT LENGTH (EXCLUDING P1's & P4's) IS LESS THAN 20M.
  3. THIS TYPE OF BARRIER SHALL NOT BE USED ON CURVES OF RADIUS LESS THAN 100m. FOR RADII LESS THAN 100m CONTACT CORUS CEP.
  4. WHERE A KERB IS REQUIRED THE PREFERRED HEIGHT IS 75mm. MAX HEIGHT IS 125mm.

Rev. No	Revision Notes	Rev. Date	By
7	Position of posts changed to 5m	31/01/12	R.P.
6	Beam view changed. Company details changed.	20/12/06	A.B.
5	Note added advising the standard Socket length, note 2 modified, notes 3 & 4 added	20/12/06	R.P.
4	Drawing Redrawn	16/10/06	R.P.

Tata Construction  
Products



TATA CP, LLANWERN WORKS  
NEWPORT, S. WALES, UK, NP19 4QZ

Sales tel: +44 (0) 1633 290011 Fax: +44 (0) 1633 464508  
 Technical tel: +44 (0) 1633 752100 Fax: +44 (0) 1633 464508  
 Tata email: [sales@tatasteel.com](mailto:sales@tatasteel.com)

DESCRIPTION N2 W4 5M CTRS DOUBLE SIDED

CUSTOMER

PRODUCT

DATE

DRAWN

SCALE

DRG. No.

VGA60

SH. REV.

1 7